



**Cordless Impact Wrench**  
**DTW300 1/2" (12.7 mm)**



# High Torque and Compact



photo: DTW301

Max Fastening Torque

**330** N·m

Overall Length

**144** mm



**DTW300**

C ring



# High Torque

Compact overall length


Max Fastening Torque  
**330 N·m**

**DTW300**  
C ring



## Changing the application mode


This tool employs several easy-to-use application modes for driving bolts with good control.

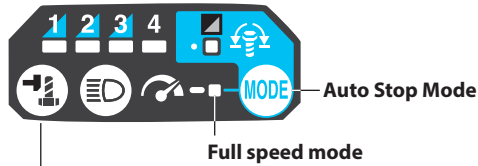


**Twin LED job light**  
with preglow and afterglow functions



Pushing a button

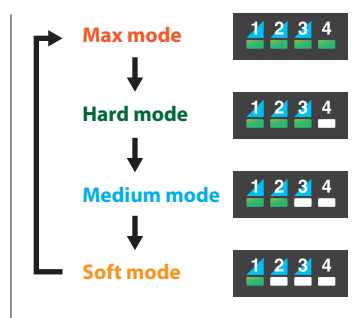

## Proper fastening torque curve

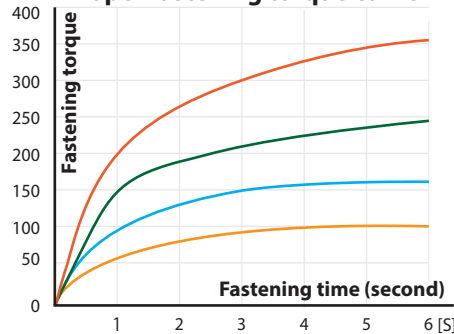

- Max mode (4)**  
High strength bolt M16
- Hard mode (3)**  
High strength bolt M16
- Medium mode (2)**  
High strength bolt M14
- Soft mode (1)**  
High strength bolt M12

photo: DTW300

**BL MOTOR**  
High power Brushless Motor

**XPT**  
Extreme Protection Technology



## Accessories

**Tool hanger set**  
with shoulder belt  
Part No. 197941-0



**Tool hanger set**  
Part No. 191K57-9



18V LITHIUM-ION	DC18RC	DC18RD	DC18SD
BL1815N 1.5Ah	15 min	30 min	30 min
BL1830B 3.0Ah	22 min	60 min	60 min
BL1850B 5.0Ah	45 min	110 min	110 min
BL1860B 6.0Ah	55 min	130 min	130 min

Cordless Impact Wrench	DTW300 1/2" (12.7 mm)
Variable Speed	DTW300
Brake	Standard Bolt: M10 - M20 (3/8" - 3/4") High Strength Bolt: M10 - M16 (3/8" - 5/8")
Reversing	Square Drive 12.7 mm (1/2")
Electronic 4-Speed	No Load Speed (RPM) 0-3,200/0-2,600/0-1,800/0-1,000
Built-in Job Light	Impacts Per Minute (IPM) 0-4,000/0-3,400/0-2,600/0-1,800
Carrying Case	Max Fastening Torque 330 N·m (240 ft.lbs.)
	Vibration Level 12.5m/s <sup>2</sup>
	Sound Pressure Level 97 dB(A)
	Sound Power Level 108 dB(A)
	Dimensions (L x W x H) w/ BL1815N: 144x81x228 mm (5-5/8"x3-3/16"x9") w/ BL1830B / BL1850B / BL1860B: 144x81x246 mm (5-5/8"x3-3/16"x9-11/16")
	Net weight 1.5 - 1.8 kg (3.4 - 4.1 lbs.)

Standard Equipment: Belt Clip, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

## Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348  
Phone : +65-6546-8700 Fax : +65-6546-8711  
Email : msgproductteam@makita.com.sg  
Website : www.makita.com.sg  
Facebook : www.facebook.com/MakitaSG



f MakitaSG



VISIT OUR WEBSITE

PRINTED IN SINGAPORE