




Cordless Recipro Saw

High power and High durability

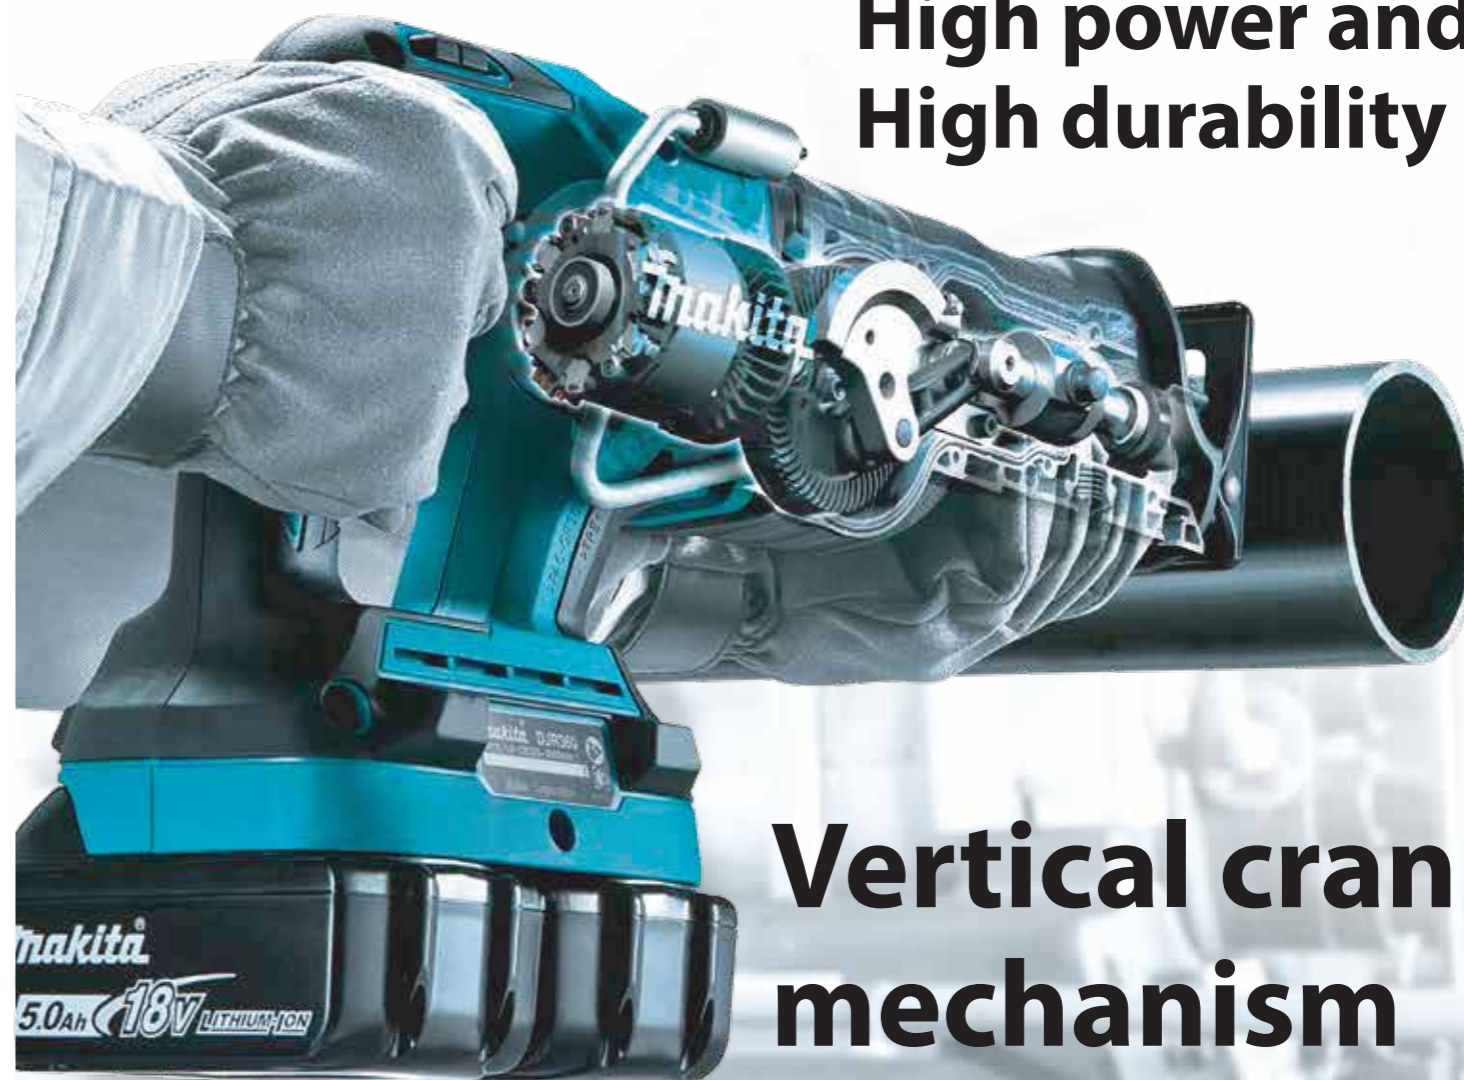

Vertical crank mechanism

LED job light (DJR360, DJR187)



Retractable rafter hook (DJR360, DJR187)



BL MOTOR
Brushless DC motor
(DJR360, DJR187)

Electronic 2-speed
(DJR360, DJR187)

Two-finger switch trigger

Soft grip
provides more comfort and control.

Electric brake




Toolless blade change
Redesign of Blade clamp makes it easier to remove a blade.

Photo : DJR187

Toolless shoe adjustment (DJR360, DJR187)

Lever system is employed instead of button system. It prevents the blade lock from unintentional releasing.



DJR360 : Two 18V Li-ion batteries can be directly installed on the machine to supply energy to the powerful 36V DC motor drive system.



Compatible batteries

with Battery fuel gauge		without Battery fuel gauge	
BL1860B 6.0Ah (197422-4)	BL1850B 5.0Ah (197280-8)	BL1830B 3.0Ah (197599-5)	BL1815N 1.5Ah (196449-1)
Fast Charger DC18RD (196934-4) Two Port Multi (Fast Charger)	Fast Charger DC18RC (195586-8)	Charger DC18SD (631851-6)	

Cordless Recipro Saw DJR360 / DJR187 / DJR186

	DJR360	DJR187	DJR186
Variable Speed	Variable Speed	Variable Speed	Variable Speed
Electronic 2-speed (DJR360, DJR187)	Electronic 2-speed	Electronic 2-speed	Electronic 2-speed
Brake	Brake	Brake	Brake
Built-in Job Light (DJR360, DJR187)	Built-in Job Light	Built-in Job Light	Built-in Job Light
Carrying Case	Carrying Case	Carrying Case	Carrying Case
Capacity	Pipe : 130mm (5-1/8") Wood : 255 mm (10")	Pipe : 130mm (5-1/8") Wood : 255 mm (10")	Pipe : 130mm (5-1/8") Wood : 255 mm (10")
Length of Stroke	32 mm (1-1/4")	32 mm (1-1/4")	32 mm (1-1/4")
Strokes Per Minute (SPM)	High: 0-3,000 Low: 0-2,300	High: 0-3,000 Low: 0-2,300	High: 0-3,000 Low: 0-2,800
Vibration Level	Cutting Boards: 16.5 m/s ² Cutting Wooden beams: 15.5 m/s ²	Cutting Boards: 16.5 m/s ² Cutting Wooden beams: 15.5 m/s ²	Cutting Boards: 13.0 m/s ² Cutting Wooden beams: 12.5 m/s ²
Vibration K factor	1.5 m/s ²	1.5 m/s ²	1.5 m/s ²
Sound Pressure Level	85 dB(A)	84 dB(A)	84 dB(A)
Sound Power Level	96 dB(A)	95 dB(A)	95 dB(A)
Noise K factor	3 dB(A)	3 dB(A)	3 dB(A)
Dimensions (L x W x H)	449x116x243mm (17-3/4"x4-9/16"x9-9/16")	439x83x231mm (17-1/4"x3-1/4"x9-1/8")	486x81x223mm (19-1/8"x3-3/16"x8-3/4")
Net weight	BL1815N : 4.0kg (8.9lbs) BL1850B : 4.6kg (10.2lbs)	BL1815N : 3.4kg (7.6lbs) BL1850B : 3.7kg (8.2lbs)	BL1815N : 3.5kg (7.6lbs) BL1850B : 3.8kg (8.3lbs)

Standard Equipment : Recipro saw blades, Fast Charger, Battery


weight according to EPTA-Procedure 01/ver.2.1

Items of standard equipment and specifications may vary by country or area.

Efficiency of Metal Cutting

Note: 1. Numbers in the charts below are relative values when the capacities of Competitor "M" at 100.
2. The test results depend to a great extent on the hardness of materials, etc.

Test material: ø1" Carbon steel pipe 25A

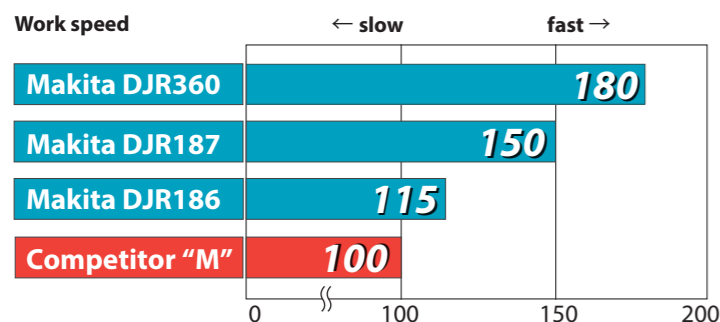

DJR360



DJR187



DJR186



Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : salesadv@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE

Item code : Z-10373

PRINTED IN SINGAPORE



Newly designed vertical crank mechanism

And featuring high output Brushless DC motor, enabling outstanding performance in cutting work.


(DJR360, DJR187)



Photo: DJR187


Photo: DJR360

Smooth cutting with new crank system

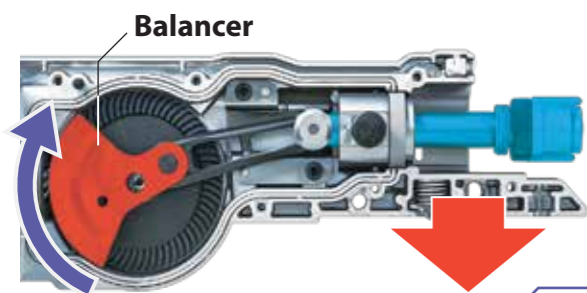

The rolling of Balancer decreases and materials are pushed stronger

Backward stroke is faster

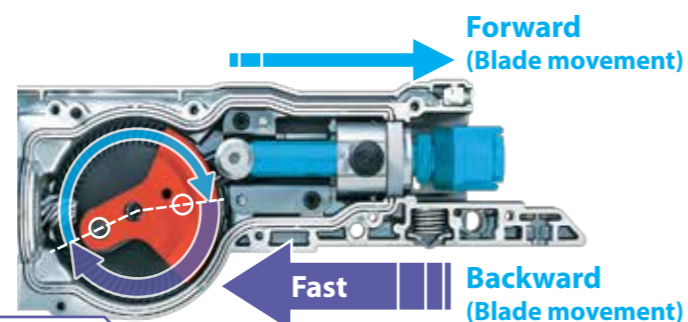

Backward rotating angle is less.

Cutting speed
approx **TWICE**
as fast as the 18Vx1 predecessor model when cutting a 25A(ø1") pipe with DJR360.

Long Stroke

32mm

High Speed
Strokes per minute
3,000min⁻¹
(DJR360, DJR187)

High durability

More durable mechanism to hold slider

A roller on the rear end of slider reciprocates on the rail of metal plate, providing higher durability than the current mechanism using plane bearing as the rear slider holder.

Mechanical durability more than **twice**

More rigid shoe

- Shoe has been reinforced.
- Fixed type shoe is used for added durability.



XPT
EXTREME PROTECTION TECHNOLOGY

