



40Vmax series movie



40Vmax mechanism movie



This movie was filmed in Japan. Models and specs may vary by country.



Cordless Rotary Hammer HR006G 52 mm (2-1/16")



Adapted for SDS-MAX bits

Cordless Hammer Series



Rotary Hammer HR006G



Demolition Hammer HM002G



Demolition Hammer HM001G



Rotary Hammer HR005G



Combination Hammer HR001G / HR002G / HR003G / HR004G




Accessories

Dust extractor attachment set

Drilling / Hammering

Part No. 196536-6

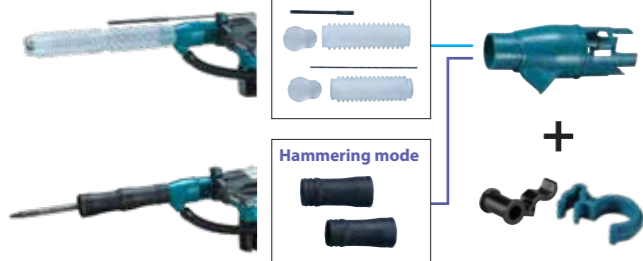

Hammering

with Vacuum hose set Part No. 196571-4



Charging Time Reference

40Vmax	Fast Charging	
	DC40RA (191E08-6)	DC40RC (191M92-9)
BL4020 2.0Ah (191L29-0)	22min	30min
BL4025 2.5Ah (191B36-3)	28min	38min
*BL4040 4.0Ah (191B26-6)	45min	67min
*BL4050F 5.0Ah (191L47-8)	50min	85min

*1 Recommended battery

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Cordless Rotary Hammer

HR006G 52 mm (2-1/16") Adapted for SDS-MAX bits

Variable Speed	EPTA-Procedure 05/2009: 21.4 J
Brake	Concrete (w/ TCT Bit): 52 mm (2-1/16")
SDS-MAX Shank	Concrete (w/ Core Bit): 160 mm (6-5/16")
Torque Limiter	Blows Per Minute (BPM) 1,100 - 2,250
Constant Speed	No Load Speed (RPM) 150 - 310
Soft Start	Sound Pressure Level 99 dB(A)
Built-in Job Light	Sound Power Level 110 dB(A)
Carrying Case	Vibration Level Chiselling Function w/ Side Handle: 7.0 m/s ²
	Chiselling Function w/ Side Grip: 7.0 m/s ²
	Hammer Drilling into Concrete: 8.5 m/s ²
	Dimensions (L x W x H) w/ BL4040: 610 x 140 x 337 mm (24 x 5-1/2 x 13-1/4")
	Net weight 12.9 - 14.3 kg (28.4 - 31.5 lbs.)

Standard Equipment : Side Handle, Side Grip, Depth Gauge, Grease vessel

Cordless / More powerful than corded tools

Impact energy [EPTA-Procedure 05/2009]

21.4 Joule



Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
 Phone : +65-6546-8700 Fax : +65-6546-8711
 Email : msgproductteam@makita.com.sg
 Website : www.makita.com.sg
 Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE

PRINTED IN SINGAPORE



40V^{Li-ion} max + 40V^{Li-ion} max **XGT X2** 80V max



Impact energy
[EPTA-Procedure 05/2009]
21.4
Joule



Drilling speed*
about **27%**
UP

Work amount*
[Drilling]
about **44** pcs

Drilling speed		
HR006G	127	
AC tool	100	
slow	speed	fast

*on a full battery charge / with battery: BL4040 x2 / concrete with compressive strength of 40N/mm² / drilled holes to a depth of 140 mm / Ø18mm

2 mode
Rotation + Hammering
↕
Hammering

AVT

ANTI VIBRATION TECHNOLOGY

Vibration level at main handle
8.5 m/s²

- A** Active dynamic vibration absorber moves in the opposite direction to the drive piston to reduce vibration.
- B** Vibration absorbing housing isolates handle and motor.
- C** Damper spring absorbs impact vibrations from the drill bit.

SOFT NO LOAD Suppression of motor speed during no-load

XPT
eXtreme Protection Technology




AFT Active Feedback sensing Technology
turns the motor off if bit rotation is suddenly forced to stop.



AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.

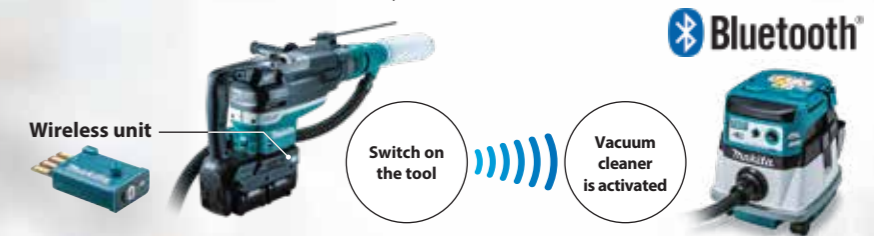

Type

- Side grip
- Side handle
- Twin LED job lights
- Variable speed control dial

BL MOTOR