Accessories

Hose

Note: Al though type B hose can be connected with power tools, Front cuffs and Joint are required



	Size	Length (m)	Туре	with Front cuffs	Part No.
2	8mm	1.5	А	22, 38	A-34235
2	8mm	2.5	А	22, 24, 38	195437-5
2	8mm	3.5	А	22, 24, 38	195433-3
2	8mm	5	А	22, 24, 38	195436-7
3	8mm	2.5	В	38	195434-1
3	8mm	5	В	38	195435-9

Straight pipe, Bending pipe, Anchor nozzle set and

Corner nozzle



Nozzle assembly



Туре	Dry/ Wet	Part No.
Universal Type	Dry/ Wet	195551-7
Compact Type A	Dry	195549-4
Compact Type B	Wet	195550-9
Wide Type	-	A-47846

Holder set 10-33









Round brush

-Corner nozzle



Front cuffs & Joint



Type	Part No.
Front cuffs 22	195547-8
Front cuffs 24	195546-0
Front cuffs 38	195545-2
Joint 22-38	195548-6

Filter set











Powder filter set	Prefilter set	Cloth filter	Filter set (for water)
Part No.	Part No.	Part No.	Part No.
*197166-6	195553-3	140248-3	195555-9



Poly bag set



pkg.	Part No.
10	195432-5

Filter bag set

(5pcs/set)



Corded and Cordless Vacuum Cleaner DVC860L (Wet & Dry / Cloth filter type) **DVC861L** (Only Dry / HEPA filter)

Max peak air flow

36V
387

Double Insulation

Variable Speed







Max sealed suction AC: 24kPa DC: 9kPa

AC: 320W DC: 25-70W

AC: 3.6m³/min DC: 2.1m³/min

Fast charger, Battery cartridge, Connection cord, Tool box, Hose complete, Poly bag set, Straight pipe, Bending pipe, Corner nozzle, Nozzle assembly, Front cuffs (DVC861Lonly)

*weight according to EPTA-Procedure 01/2003

Items of standard equipment and specifications may vary by country or area.


Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348 Phone: +65-6546-8700 Fax: +65-6546-8711 Email: salesadv@makita.com.sg Website: www.makita.com.sg





Corded and Cordless Vacuum Cleaner DVC860L (Wet & Dry / Cloth filter type) DVC861L (Only Dry / HEPA filter)

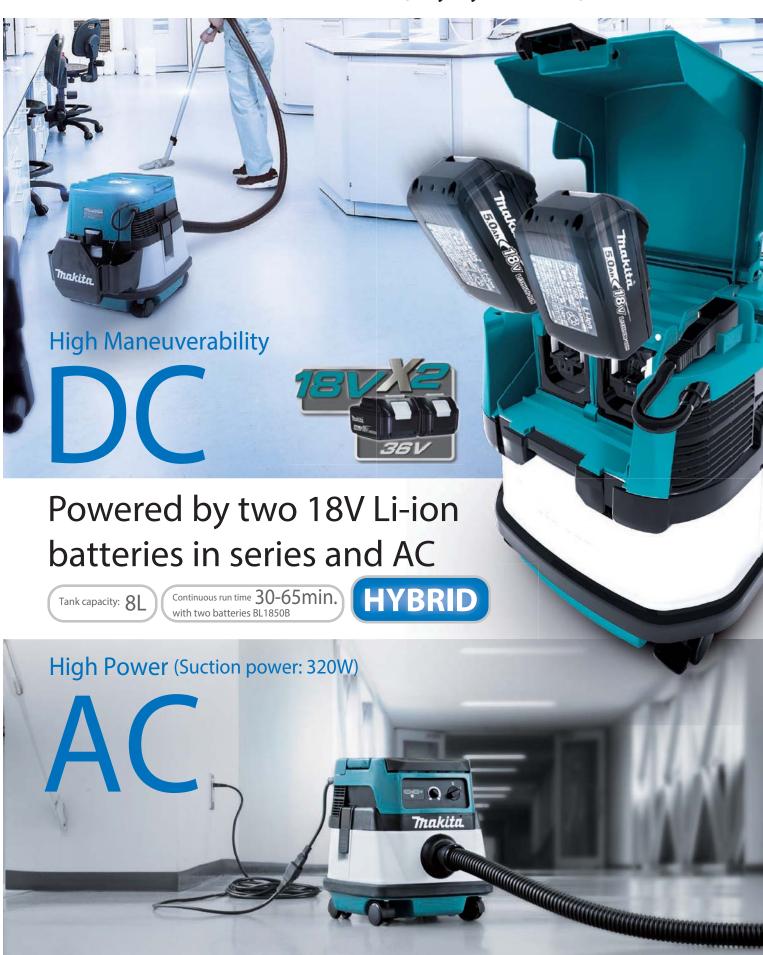





On DC power + On AC power

Suction power **70** w

Max air flow **2.1** m²/min Max sealed suction **9.0** kPa










Max air flow **3.6** m²/min

Max sealed suction **24.0** kPa







Removable power supply



Continuous run time On a single full battery charge: minute

BL1840B BL1830B **Battery** 30min. 25min. 20min. Run time 65min. 50min. 40min. Low **Charging time** DC18RD 45min. 36min. 22min. DC18RC 45min. $\times 2$ 36min. $\times 2$ $22min. \times 2$ DC18SD 110min. $\times 2$ 90min. $\times 2$ $60 min. \times 2$





Large on-off switch

• allows for easy on/off switching. • functions only when Main power switch is on to prevent accidental switch-on during transportation, etc.



Dual battery fuel gauge



Variable suction power control by dial



Caster stopper



Removable storage box



On-tool pipe storage

