



Cordless Brad Nailer  
FN001G



# 40V Li-ion max



Beautiful  
finish

## Cordless 18 Ga 40 mm (1-5/8") Brad Nailer



Work volume on a single full battery charge

about **5,000** nails

with battery: BL4025  
nail: Length 15-40 mm,  
Gauge 18 Ga






## High power **BL MOTOR**

40Vmax XGT Li-Ion battery and BL motor quickly re-compress the spring for next firing.

### Counterweight mechanism

reduces vibration by moving a counterweight in the opposite direction of the hammer.

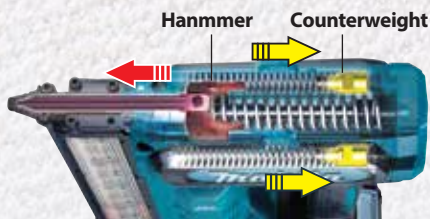

### Compact and lightweight design

for high maneuverability


Lightweight  
at **2.6kg**  
(with BL4020)

**243mm**




### Contact top designed for easy nail placement

Nail shooting port is located in the center of contact arm, enabling accurate nail placement.



### Slim nose with nose adapter



### Driving depth adjustment



### LED job light



**XPT**  
eXtreme Protection  
Technology

### Accessories

Nose Adapter S  
Part No. 422665-2



### Battery Charging Time Reference

	DC40RA (Fast Charging)	DC40RC
<b>BL4050F</b> 5.0Ah	<b>50min</b>	<b>85min</b>
<b>BL4040</b> 4.0Ah	<b>45min</b>	<b>67min</b>
<b>BL4025</b> *1 2.5Ah	<b>28min</b>	<b>38min</b>
<b>BL4020</b> *1 2.0Ah	<b>22min</b>	<b>30min</b>

\*1 Recommended battery

### Cordless Brad Nailer FN01G

Depth Adjustment	<b>Capacity</b>	Length: 15, 20, 25, 30, 35, 40 mm (5/8, 3/4, 1, 1-3/16, 1-3/8, 1-5/8") Gauge: 18 Ga
Auto Firing Stop	<b>Magazine Capacity</b>	100
Built-in Job Light	<b>Shot q'ty on a single full battery charge</b>	w/ BL4025: 5,000
Carrying Case	<b>Vibration Level</b>	2.5 m/s <sup>2</sup> or less
<b>Standard Equipment:</b>	<b>Sound Pressure Level</b>	81 dB(A)
Safety Goggles,	<b>Sound Power Level</b>	92 dB(A)
Nose Adapter, Hex	<b>Dimensions (L x W x H)</b>	w/o Battery: 234 x 86 x 243 mm (9-1/4 x 3-3/8 x 9-9/16") w/ BL4020 / BL4025: 265 x 86 x 243 mm (10-3/8 x 3-3/8 x 9-9/16") w/ BL4050F: 291 x 86 x 263 mm (11-1/2 x 3-3/8 x 10-3/8")
Wrench, Belt Clip,	<b>Net weight</b>	2.6 - 3.2 kg (5.7 - 7.1 lbs.)
Battery, Charger		

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

### Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348  
Phone : +65-6546-8700 Fax : +65-6546-8711  
Email : msgproductteam@makita.com.sg  
Website : www.makita.com.sg  
Facebook : www.facebook.com/MakitaSG



**MakitaSG**



VISIT OUR WEBSITE