

XGT
40V Li-ion max

40Vmax
series
movie



40Vmax
mechanism
movie



This movie was filmed
in Japan.
Models and specs may
vary by country.

Satisfy Professional's Needs



Makita

**Cordless Rotary Hammer
HR005G 40 mm (1-9/16") Adapted for SDS-Max bits**

High Power

Durability

Digital Communication



LED Flashlight
ML001G

LED Worklight
ML002G

XGT
40V Li-ion max **XGT X2**
80V max

Rotary Hammer
HR006G

Demolition Hammer
HM002G



Fan
CF001G

Recipro Saw
JR001G

Impact Driver
TD001G

Impact Wrench
TW001G
TW004G

Driver Drill
DF001G / DF002G

Hammer Driver Drill
HP001G / HP002G

Slide Compound Miter Saw
LS002G

LED Flashlight
ML001G

LED Worklight
ML002G

Circular Saw
HS003G / HS004G

Angle Grinder
GA003G - GA038G
28 models

Combination Hammer
HR001G / HR002G /
HR003G / HR004G

Rotary Hammer
HR005G

Demolition Hammer
HM001G



XGT

40V Li-ion max

Impact energy
[EPTA-Procedure 05/2009]

**8.0
Joule**

Portable Power Pack

PDC01

Powered by up to four 18V LXT
batteries



PDC1200

Equipped with built-in battery cells



Charger:
DC4001
(191L01-2)

Charging time:
6hours

**Adapter set
(40Vmax)**

Part No. 191N62-4




Accessories

Dust Extractor Attachment Set

Drilling / Hammering

Part No. 196536-6

Drilling mode




Hammering mode



Hammering

with Vacuum hose set
Part No. 196571-4

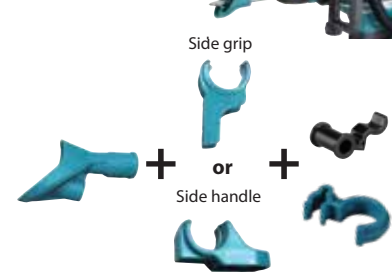

Cordless Rotary Hammer

HR005G 40 mm (1-9/16") Adapted for SDS-Max bits

Variable Speed	Impact Energy EPTA-Procedure 05/2009: 8 J
Brake	Capacity Concrete (w/ TCT Bit): 40 mm (1-9/16")
SDS-MAX Shank	Blows Per Minute (BPM) 1,450 - 2,900
Torque Limiter	No Load Speed (RPM) 250 - 500
Constant Speed	Sound Pressure Level 91 dB(A)
Soft Start	Sound Power Level 102 dB(A)
Dust Collection	Vibration Level Hammer Drilling into Concrete: 5.0 m/s ²
Built-in Job Light	Chiselling Function w/ Side Grip: 4.0 m/s ²
Carrying Case	Chiselling Function w/ Side Handle: 4.0 m/s ²
	Dimensions (L x W x H)
	w/o Battery: 477 x 115 x 286 mm (18-3/4 x 4-1/2 x 11-1/4")
	w/ BL4040: 500 x 115 x 286 mm (19-3/4 x 4-1/2 x 11-1/4")
	w/ BL4050F: 520 x 115 x 305 mm (20-1/2 x 4-1/2 x 12")
	Net weight 7.4 - 8.2 kg (17.0 - 18.1 lbs.)
	Standard Equipment: Side Handle, Side Grip, Depth Gauge, Bit Grease, Cloth, Wireless Unit (country-specific), Wireless Unit Adapter (country-specific), Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

**As powerful
as AC tools**

Net weight

7.7 kg

with BL4040



Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG




VISIT OUR WEBSITE

PRINTED IN SINGAPORE

BL MOTOR AFT AWS AVT SOFT NOLOAD XPT

Impact energy
[EPTA-Procedure 05/2009]
8.0
Joule

diameter 32mm (1-1/4") / Drilled holes to a depth of 140 mm / Concrete with compressive strength of 40N/mm²

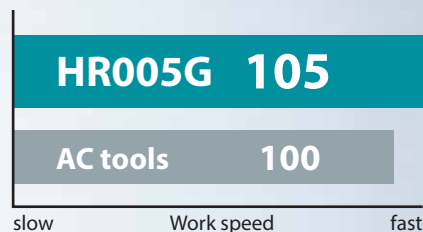

Anti-Vibration Technology

AVT Vibration level at main handle
5.0 m/s²

Active dynamic vibration absorber moves in the opposite direction to the drive piston to reduce vibration.




SOFT NO LOAD




AFT Active Feedback sensing Technology

turns the motor off if bit rotation is suddenly forced to stop.

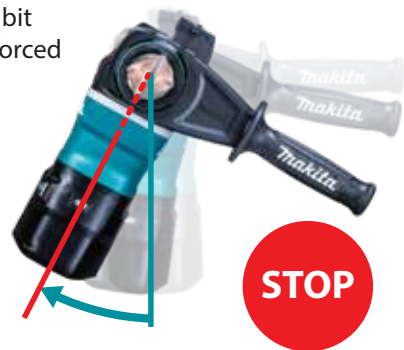

AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.

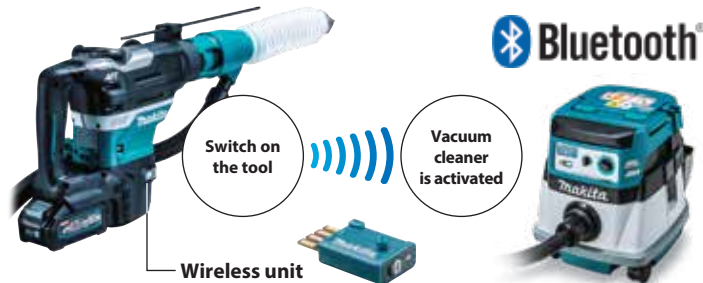

XPT eXtreme Protection Technology

protects the motor and gears from dust and debris.



Type

Side grip



Side handle



BL MOTOR