

Makita[®]

18V Line Trimmer

LXT

DUR193



18V Line Trimmer

The DUR193 has a redesigned handle to distribute the weight of the battery and improve the overall balance.


The simple lever lock allows the shaft to be extended to provide a comfortable position for a wide range of heights, and the position of the front handle can be adjusted to further suit different users.

The lever lock also allows the shaft to be rotated 180 degrees, to allow the head to cut in a vertical position without the user changing their hand position.

The wire guard can be flipped down to protect the base of plants or edges from damage or flipped up to allow a closer cut or while vertically edging.



Product Overview

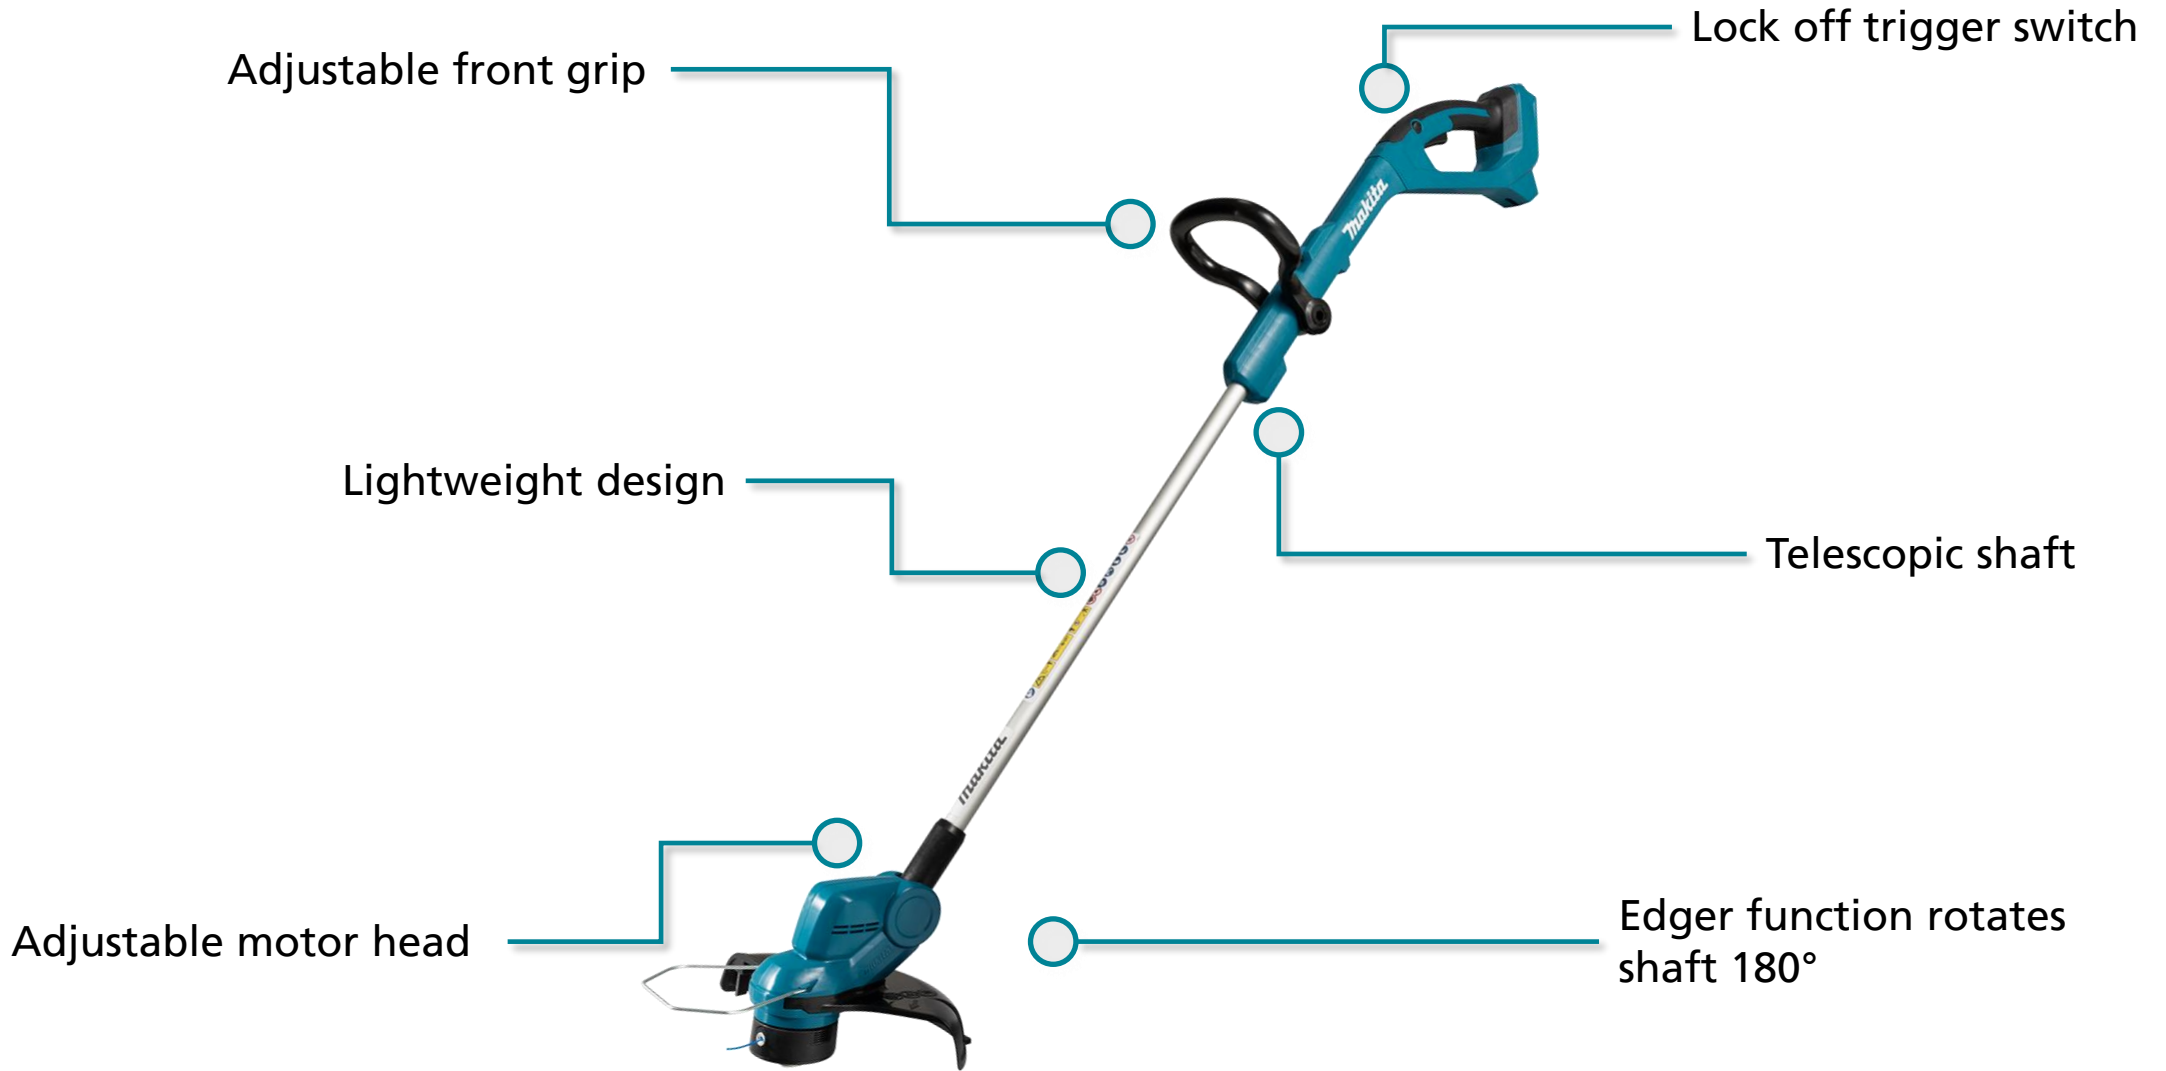

Product Specification Sheet



Rotation	Clockwise
Max. Power Output	0.28kW
No Load Speed	0-7,800rpm
Nylon Head Accepts Nylon Line	1.65mm x 3.0m
Max. Cutting Width	260mm
Continuous Runtime (BL1830B)	25 minutes*
Overall Length	1,198mm
Skin Weight	1.7kg
Voltage	18V

- **Edger Function** – The shaft can be rotated 180° to allow for vertical edging while keeping a familiar hand position.
- **Adjustable Motor Head** – Allows the motor head to be adjusted across 5 angles (0°, 15°, 30°, 45°, 60°) to provide comfortable positions while in use and so the unit can lay flat in storage.
- **Bump & Feed Head** – unspools nylon line during use with a tap on the ground while spinning at full rpm.
- **Wire Guard** – Prevents damage to plants or edges by guiding the cutting head close to surfaces without the nylon line coming into contact.
- **Telescopic Shaft** – Adjusts quickly from 1,198 to 1,387 overall length to provide comfortable use for users with a range of different heights.
- **Redesigned Rear Handle** – Battery position has been moved to provide improved weight distribution.

Advantages

Comfort



Adjustable front handle for comfortable use & storage

Ergonomics



4 stage head adjustment and telescopic pipe suits a wide range of heights

Durability



Edger function allows the head to rotate 180 degrees for vertical cutting






Efficiency



Simple lever lock to extend shaft or rotate to edger position


Our Range



	DUR193Z - NEW	DUR192LZ	DUR189Z	DUR190LZX5	DUR368LZ	DUR368AZ	DUR369LZ	DUR369AZ
								
Rotation	Clockwise	Counter-clockwise	Clockwise	Counter-clockwise	Counter-clockwise	Counter-clockwise	Counter-clockwise	Counter-clockwise
Max. Power Output	0.28kW	0.46kW	0.24kW	0.24kW	0.55kW	0.55kW	1kW	1kW
No Load Speed	7,800rpm	Lo: 0 – 4,500rpm High: 0 – 6,000rpm	Lo: 0-4,000rpm Med: 0-5,000rpm High: 0-6,000rpm	Lo: 0-3,500rpm Med: 0-5,100rpm High: 0-6,000rpm	Hi: 6,500 rpm Med: 5,300rpm Lo: 3,500rpm	Hi: 6,500 rpm Med: 5,300rpm Lo: 3,500rpm	Hi: 7,000 rpm Med: 5,500rpm Lo: 4,600rpm	Hi: 7,000 rpm Med: 5,500rpm Lo: 4,600rpm
Nylon Head Accepts Nylon Line	1.65mm x 3.0m	2.0mm x 3.0m	2.0 - 2.4mm x 3.0m	2.0 - 2.4mm x 3.5m	2.0 – 2.4mm x 3.5m	2.0 – 2.4mm x 3.5m	2.0 – 2.4mm x 3.5m	2.0 – 2.4mm x 3.5m
Max. Cutting Width	260mm	300mm	300mm	300mm	350mm	350mm	430mm	430mm
Overall Length	1,198mm	1,670mm	1,618mm	1,836mm	1,758mm	1,758mm	1,846mm	1,846mm
Skin Weight	1.7kg	2.4kg	2.8kg	2.9kg	3.9kg	4.1kg	5.1kg	5.3kg
Weight (With Battery)	2.3kg	3.0kg	3.4kg	3.5kg	4.5kg	4.7kg	6.3kg	6.5kg
Voltage	18V	18V	18V	18V	36V (18V x 2)	36V (18V x 2)	36V (18Vx2)	36V (18Vx2)

Accessories

Standard Accessories

	127508-0	Band Assembly
---	----------	---------------

Optional Accessories

	E-01731	Four Leaf Silent Nylon Line 1.65mm x 15m
	E-01747	Four Leaf Silent Nylon Line 1.65mm x 30m