




Cordless Rotary Hammer HR166D 16 mm (5/8")



SDS-PLUS
shank



One-hand rotary hammer



Hammering
with
Rotation

2
mode



Rotation



with Side grip assembly
and Depth gauge

Powered by Slide Li-ion Battery of Makita's New 12Vmax Platform



BL1016
1.5Ah



BL1021B
2.0Ah



BL1041B
4.0Ah



DC10SB



DC10WD



Extremely Compact and Lightweight for increased maneuverability




250 mm

Lightweight
1.8kg
with BL1016



SDS-PLUS shank
One touch sliding chuck
for easy bit changes

Vibration absorbing housing
reduces the vibration to the hand.

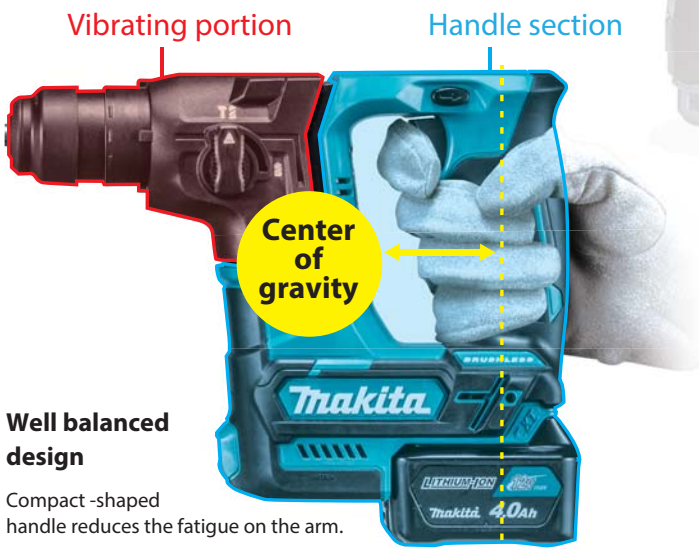

Well balanced design

Compact -shaped handle reduces the fatigue on the arm.

Handle section

Vibrating portion

Center of gravity

Li-ion Battery & Charging Time Reference

		*BL1041B 12Vmax 4.0Ah	*BL1021B 12Vmax 2.0Ah	BL1016 12Vmax 1.5Ah
Charging time	DC10SB	60 min	30 min	22 min
	DC10WD	130 min	70 min	50 min

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : salesadv@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



MakitaSG



VISIT OUR WEBSITE

Item code : Z-10340

PRINTED IN SINGAPORE



18V DHR242

LED job light



Brushless motor



Accessories

Wide hook set
(Option)



Part No. 197224-8

Dust cup set

Use with grip base set

Part No.
198362-9

198376-8 (EU)



Cordless Rotary Hammer

HR166D

- Variable Speed
- Brake
- Reversing
- Constant Speed
- SDS-PLUS Shank
- Dust Collecting
- Built-in Job Light
- Carrying Case

Impact Energy Capacity

EPTA-Procedure 05/2009: 1.1 J
Concrete: 16 mm (5/8")
Steel: 10 mm (3/8")
Wood: 13 mm (1/2")

Impacts Per Minute (IPM)

0 - 4,800

No Load Speed (RPM)

0 - 680

Vibration Level

Hammer Drilling Into Concrete: 7.5 m/s²
Drilling Into Metal: 2.5 m/s² or less

Sound Pressure Level

86 dB(A)

Sound Power Level

97 dB(A)

Dimensions (L x W x H)

250x74x187mm (9-7/8"x2-15/16"x7-3/8")

Net weight

BL1016: 1.8 kg (4.0lbs.)
BL1041B: 2.0 kg (4.4 lbs.)

Standard Equipment:

Dust Cup (country-specific), Side Grip, Depth Gauge, Battery, Charger

weight according to EPTA-Procedure 01/ver.2.1
Items of standard equipment and specifications may vary by country or area.