



# Combination Hammer with Self Dust Collection System HR2652

26 mm (1"), SDS-PLUS bits



Adapted for  
SDS-PLUS bits



## Secure connection between dust case and dust collecting section allows for less dust leakage

**Dust case**  
Part No. 199555-1




Transparent dust case for easy checking of  
collected dust amount

## Enables to accept longer drill bits

### Adjustable drilling depth

Telescopic guide also functions as a  
depth gauge.  
A desired drilling depth can be  
adjusted simply by sliding a push  
button on the guide to the desired  
point.

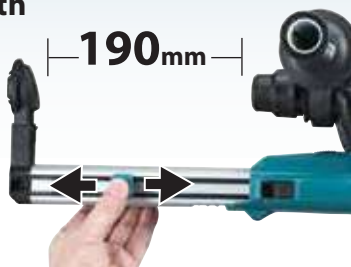

### Position adjustment of Dust Collection Inlet

one action adjustment according  
to bit length simply by pushing a  
single push button



# HEPA filter

## Filter cleaning mechanism

by turning the dial, the dust falls from the filter



**Filter plate**  
Filter plate is engineered to prevent debris entering into motor when using without dust collection system

## High dust collection performance for overhead application

Dust collection rate for overhead




## Large Fan Provides Incredibly High Dust Collection Power



65 mm

High rotation speed  
**20,900**  
min<sup>-1</sup>


## Detachable Dust collection system



Rotation with hammering



Hammering



Rotation ( Drill Chuck is option )

## Accessories

### Sealing Cap

Part No. 424474-5



### Depth Gauge

Part No. 324219-0



## Combination Hammer with Self Dust Collection

**HR2652** 26 mm (1"), Adapted for SDS-PLUS bits

325

- Double Insulation
- Variable Speed
- Reversing
- SDS-PLUS Shank
- Torque Limiter
- Dust Collection

<b>Continuous rating input</b>	800W
<b>Impact Energy</b>	EPTA-Procedure 05/2009 : 2.2 J
<b>Capacity</b>	Our experimental conditions: 2.9 J Concrete : 26 mm (1") Core Bit: 68 mm (2-11/16") Diamond Core Bit (Dry Type): 80 mm (3-1/8") Steel : 13 mm (1/2") Wood : 32 mm (1-1/4")
<b>Blows Per Minute (BPM)</b>	0 - 4,600
<b>No Load Speed (RPM)</b>	0 - 1,200
<b>Sound Pressure Level</b>	91 dB(A)
<b>Sound Power Level</b>	102 dB(A)
<b>Vibration Level</b>	Hammer Drilling into Concrete: 12.5 m/s <sup>2</sup> Chiselling Function w/ Side Grip: 9.5 m/s <sup>2</sup> Drilling Into Metal: 2.5 m/s <sup>2</sup>
<b>Dimensions (L x W x H)</b>	604 x 89 x 260 mm (23-3/4"x3-1/2"x10-1/4")
<b>Net weight</b>	3 - 4.3 kg (6.7 - 9.4 lbs.)
<b>Power supply cord</b>	2.5 m (8.2 ft.)

**Standard Equipment :**  
Side Grip, Depth Gauge, Sealing Cap

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

## Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348  
Phone : +65-6546-8700 Fax : +65-6546-8711  
Email : msgproductteam@makita.com.sg  
Website : www.makita.com.sg  
Facebook : www.facebook.com/MakitaSG



f MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE