



Toll Free: 87 PERMATEX
(877-376-2839)

10 Columbus Blvd., Hartford,
Connecticut 06106

6875 Parkland Boulevard, Solon
Ohio 44139

Technical Data Sheet

Permatex® Battery Cleaner

AAM Revised 10/02

PRODUCT DESCRIPTION

S.I.N.: 834-300

Permatex® Battery Cleaner is an aerosol product for cleaning all types of storage batteries and attachments in vehicles and emergency power supply systems. The product penetrates and removes corrosion, dirt and grime instantly.

PRODUCT BENEFITS


- Removes power-robbing corrosion
- Fast acting
- Penetrates - no disassembly required

TYPICAL APPLICATIONS

- Batteries
- Cables
- Terminal connections

DIRECTIONS FOR USE

1. Provide adequate ventilation.
2. Shake can with ball agitator for one minute. For best results, aerosol can should be at room temperature before spraying.
3. Holding can 8 to 10 inches from the surface to be cleaned, press the nozzle and discharge the product onto the corroded area. The product discharges as a foam.

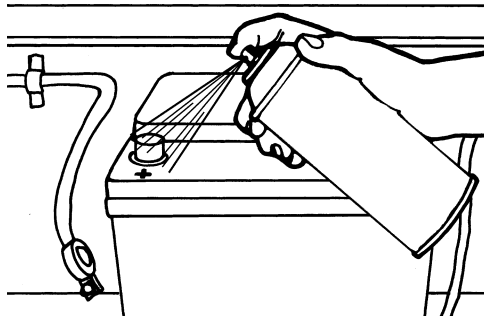

4. Let stand for approximately five minutes
5. Flush with water using a gentle flow to avoid splashing the dissolved corrosion.
6. Wipe battery clean with rag, shop cloth or paper towel.
7. For best results, seal terminals with Permatex® Battery Protector & Sealer.

For Cleanup

1. Clean hands with Permatex® brand hand cleaners.

PROPERTIES OF MATERIAL

Chemical Type
Appearance
Odor
Flash Point

NFPA 704 Flammability Rating

Typical Value

Alkaline cleaner
White foam
Amine

Aerosol, contents under pressure,
consult MSDS
4 (Highly flammable)

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected for use with chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).

ORDERING INFORMATION

Part Number	Container Size
80369 (SA-8)	6 oz. aerosol can

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8_ to 28_C (46_ to 82_F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range.

NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **Permatex, Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Permatex, Inc. products and disclaims any liability for consequential or incidental damages of any kind, including lost profits.** This product may be covered by one or more United States or foreign patents or patent applications.

NOT FOR PRODUCT SPECIFICATIONS.

THE TECHNICAL DATA CONTAINED HEREIN ARE INTENDED AS REFERENCE ONLY.

PLEASE CONTACT PERMATEX, INC., TECHNICAL SERVICE DEPARTMENT FOR ASSISTANCE AND RECOMMENDATIONS FOR YOUR SPECIFIC APPLICATION.
PERMATEX, INC., HARTFORD SQUARE NORTH, 10 COLUMBUS BOULEVARD, HARTFORD, CT 06106 PHONE - (1-87)PERMATEX)